


BEFORE PRINTING TURN OFF ANY SIZE ADJUST SETTING ON YOUR PRINTER,
 VERIFY PRINTED HOLE SIZES BEFORE DRILLING

THE DPM4-RL PCB ASSEMBLY IS NOT UL LISTED, USER ASSUMES ALL LIABILITY WITH THE
 USE OF THIS PRODUCT. THE DPM4-RL PCB - DESIGNED FOR 120VAC AT 5 AMPS MAX.


DPM4-RL DRILL TEMPLATE

Cut and tape this template on your chassis to use a guide.
 Re space the connectors and PCB as desired.

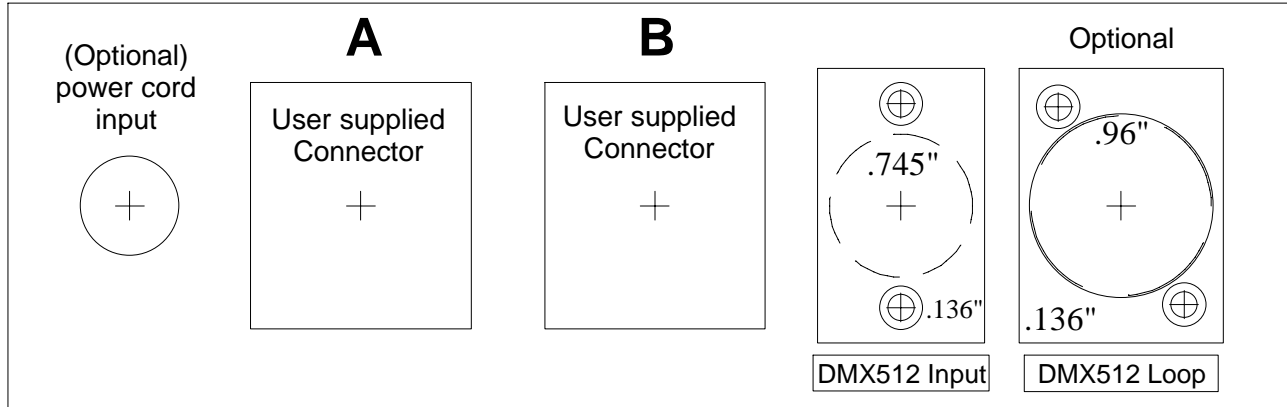


Dimensions for Switchcraft D3F, D5F,
 D3M, D5M 3 or 5 Pin Chassis mount XLR's

Any 3 or 5 pin XLR connector can be
 used; chassis mount or inline.

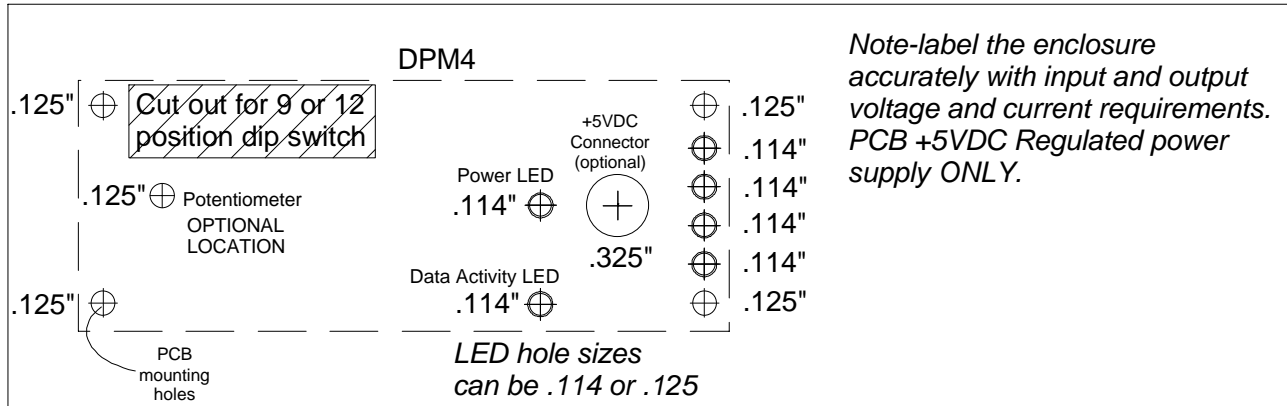

WIRING DIAGRAM Top View

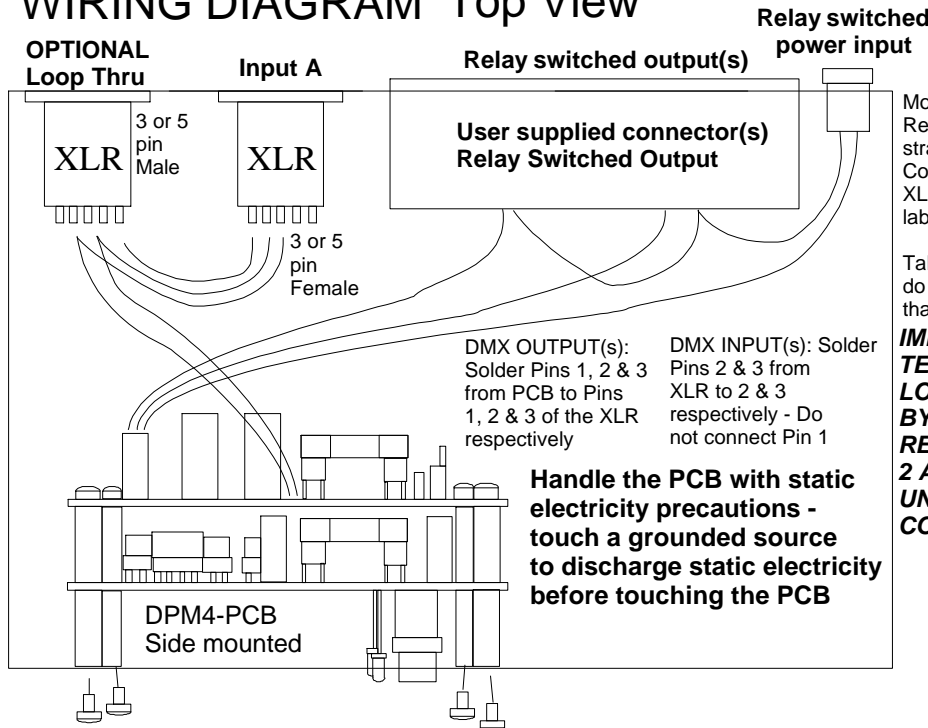

Mount XLR connector as desired.
 Recommended wire: 24 AWG
 stranded & twisted together.
 Connect pins 2 and 3 only from the
 XLR input connector to the PCB
 labeled "Input A" pins 2 & 3.

Take care AND inspect that the wires
 do NOT short. Check for stray wires
 that could short.

**IMPORTANT NOTE -
 TERMINATE ALL NON
 LOOP THRU CONNECTORS
 BY SOLDERING A 120 OHM
 RESISTOR BETWEEN PINS
 2 AND 3. TERMINATE ALL
 UNUSED LOOP THRU
 CONNECTORS.**