


**BEFORE PRINTING TURN OFF ANY SIZE ADJUST SETTING ON YOUR PRINTER,
VERIFY PRINTED HOLE SIZES BEFORE DRILLING**

DMX10V Rev 6 DRILL TEMPLATE

Cut and tape this template on your chassis to use a guide.
Re space the connectors and PCB as desired.

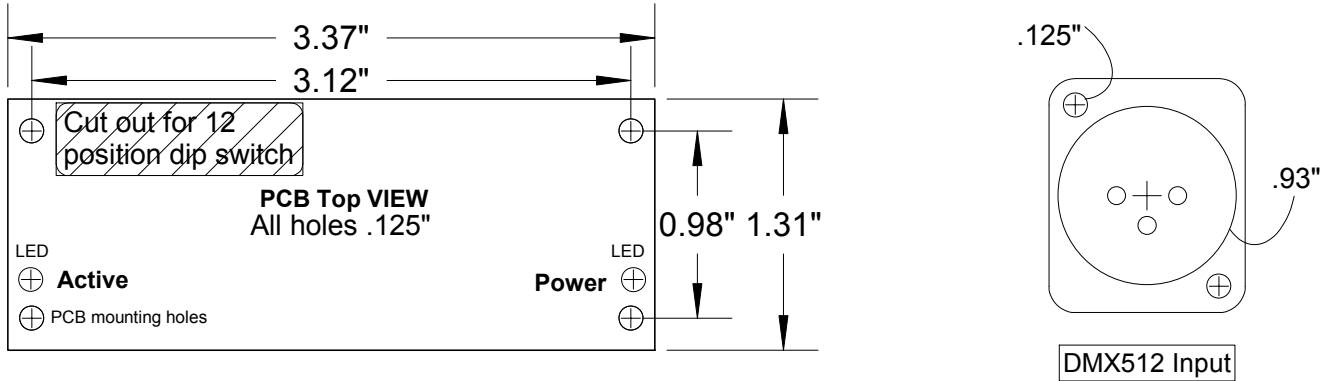

Note-label the enclosure accurately with input and output voltage and current requirements.

Dimensions for Neutrik 3 or 5 Pin Male/Female Chassis Mount XLR's.
Any 3 or 5 pin XLR type can be used; chassis mount or inline.

*PCB (+12V DC)
Regulated power supply ONLY.*

**Handle the PCB with static electricity precautions -
touch a grounded source to discharge static electricity before touching the PCB**

WIRING DIAGRAM Top View

